



EXUN series Aluminium internal hubs



Approvals / Characteristics



Features

- Junction for branch conduits in hazardous locations
- Accessible wiring chamber provides a convenient location to maintain or change a system, pull conductors and make splices
- Internal hub design ideal for installation where space is limited
- Copper-free aluminium provides increased corrosion resistance
- Precision cast and machined surfaces permit safer wire pulling


Certification and standards

UL Listed and CSA Certified for hazardous locations:
 Federal Spec W-C-586
 Class I Div 1 & 2 CD
 Class II Div 1 EFG
 Class III Div 1 & 2
 NEMA 3, 4, 7 CD, 9 EFG

Aluminium internal hubs - EXUN series

Dimensions

Technical specifications

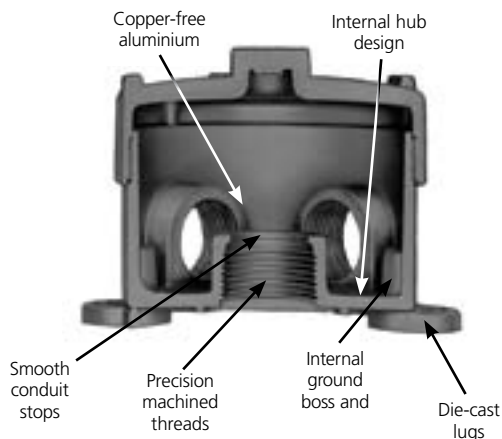

EXUN - 5-hole aluminium box



Type	Hub Size	Description	Unit Quantity	Standard Package	Weight per 100 (lbs)
EXUN-1	1/2"	(5) Outlets	1	5	140
EXUN-2	3/4"	with (3) Close-Up Plugs	1	5	140
EXUN-3	1"	with (3) Close-Up Plugs	1	5	140

EXUN - 4-hole aluminium box



Type	Hub Size	Description	Unit Quantity	Standard Package	Weight per 100 (lbs)
EXUN-11	1/2"	(4) Outlets	1	5	140
EXUN-22	3/4"	with (2) Close-Up Plugs	1	5	-

Size range

All sizes are listed in the tables on each page for each cat. no.

Materials

Die-cast aluminium alloy A360 with less than .004 copper content (copper-free)

Finish

Aluminium lacquer finish