

**Ty-Rap®**

**Stainless Steel  
Cable Ties**



**United States**

Tel: 901.252.8000  
Fax: 901.252.1354

**Canada**

Tel: 450.347.5318  
Fax: 450.347.1976

**Technical Services**

Tel: 888.862.3289

## Stainless Steel Cable Ties


### Ty-Rap® Polyester-Coated Stainless Steel Ball-Lock Cable Ties

Designed for continuous exposure to salt spray, sunlight, petroleum and chemicals!

Stainless steel offers excellent strength, durability and corrosion-resistance properties. But to stand up to the harshest environments in the world, such as those found on offshore drilling rigs, petroleum refineries, shipyards and chemical processing plants, even stainless steel needs an added layer of protection. That's why Ty-Rap® has added coated ties to its line of stainless steel cable ties. These new ties offer the same easy-to-install, low-profile, secure ball-lock mechanism as standard Ty-Rap stainless steel ball-lock ties, but they're fully coated with a layer of rugged polyester to seal out salt, moisture, chemicals and UV radiation. Put these Ty-Rap® tough ties to the test against the elements in your harshest applications!



- 316 grade (marine-grade) stainless steel construction for strength and durability
- Fully coated with polyester to resist corrosion, UV radiation, temperature extremes, chemicals, impact, abrasion and cracking
- No sharp edges — easier on installer's hands than bare steel
- Low-smoke, halogen-free polyester coating offers added personnel safety
- Pointed tail enables fast, easy insertion
- Low-profile ball in wedge-shaped head locks tie securely in place
- Wide operating temperature range of -40° F to 302° F (-40° C to 150° C)
- Certifications/Standards: Lloyds Register, DNV, GL, CE, RoHS

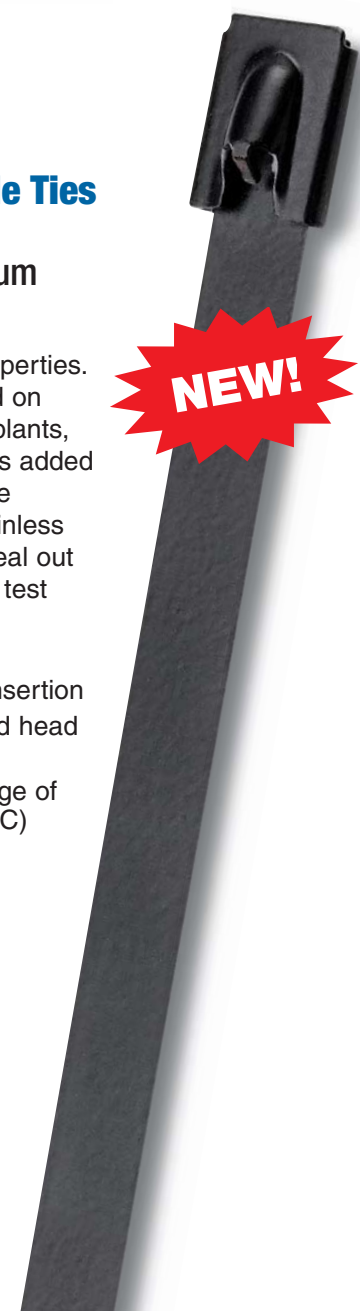

### Ty-Rap® Polyester-Coated Stainless Steel Ball-Lock Cable Ties

Cat. Number	Length (in/mm)	Width (in/mm)	Max. Bundle Dia. (in/mm)	Tensile Strength (lbs/N)	Std. Pkg. Qty.	UPC Number
<b>316 Grade Stainless Steel – Fully Polyester Coated</b>						
LS-4.6-200-C	7.9/201	.18/4.6	2/51	100/444.8	100	786209-87672
LS-4.6-360-C	14.3/362	.18/4.6	4/102	100/444.8	100	786209-87675
LS-4.6-520-C	20.5/521	.18/4.6	6/152	100/444.8	100	786209-87677
LS-4.6-680-C	26.8/679	.18/4.6	8/203	100/444.8	100	786209-87679
LS-7.9-200-C	7.9/201	.31/7.9	2/51	250/1112	50	786209-87681
LS-7.9-360-C	14.3/362	.31/7.9	4/102	250/1112	50	786209-87683
LS-7.9-520-C	20.5/521	.31/7.9	6/152	250/1112	50	786209-87685
LS-7.9-680-C	26.8/679	.31/ 7.9	8/203	250/1112	50	786209-87687

**Engineered Ty-Rap® Tough to Withstand the  
World's Harshest Environments!**

**Ty-Rap®**

**Stainless Steel Cable Ties**

**Ball-Lock Ties**

- Polyester-coated 316 grade (marine-grade) stainless steel
- Uncoated 302/304 grade stainless steel
- Uncoated 316 grade (marine-grade) stainless steel

**Now Available  
Polyester-Coated 316  
Grade Stainless Steel —  
Ideal for Offshore Drilling  
Applications!**

**Roller-Locking Ties**

- Uncoated 302/304 grade stainless steel
- Uncoated 316 grade (marine-grade) stainless steel

**Dual-Lock Ties**

- Uncoated 304 grade stainless steel
- Also available in uncoated 316 grade stainless steel

**Re-Usable Ties**

- Nylon 11-coated 200/300 series stainless steel
- Also available in nylon 11-coated 316 grade stainless steel

**Free-End Clamps**

- Uncoated 201 grade stainless steel

**Multi-Lok Stainless Steel Self-Locking Ties**

- Nylon coated 316 grade stainless steel
- Uncoated 316 grade stainless steel

**Stainless Steel Strap Ties**

- Uncoated 316 grade stainless steel





## Applications

**Tough Ties for Rough Environments...**



*Offshore Drilling*



*Petrochemical Processing*



*Shipbuilding*



*Washdown Areas*



*Food and Beverage Processing*



*Pharmaceutical Processing*

## Stainless Steel Cable Ties

### Ty-Rap® Uncoated Stainless Steel Ball-Lock Cable Ties

Ideal for high temperatures and harsh environments.

- Available in 302/304 and 316 grade stainless steel construction
- Self-locking with no crimping or folding required for fast, easy installation
- Low-profile head — .20" max.
- .18" width offers 100 lbs. tensile strength
- .31" width offers 250 lbs. tensile strength
- Six standard lengths plus custom lengths available on request



### Ty-Rap® Stainless Steel Ball-Lock Cable Ties

Cat. Number	Length (in/mm)	Width (in/mm)	Max. Bundle Dia. (in/mm)	Tensile Strength (lbs/N)	Std. Pkg. Qty.	UPC Number
<b>302/304 Grade Stainless Steel — Uncoated</b>						
LS-4.6-200A	7.9/201	.18/4.6	2/51	100/444.8	100	786210-24215
LS-4.6-360A	14.2/360	.18/4.6	4 /102	100/444.8	100	786210-24216
LS-4.6-520A	20.5/520	.18/4.6	6/152	100/444.8	100	786210-24217
LS-4.6-680A	26.7/679	.18/4.6	8/203	100/444.8	100	786210-24218
LS-4.6-840A	33.0/838	.18/4.6	10/254	100/444.8	100	786210-24219
LS-7.9-200A	7.9/201	.31/7.9	2/51	250/1112	50	786210-24220
LS-7.9-360A	14.2/360	.31/7.9	4/102	250/1112	50	786210-24221
LS-7.9-520A	20.5/520	.31/7.9	6/152	250/1112	50	786210-24222
LS-7.9-680A	26.7/679	.31/7.9	8/203	250/1112	50	786210-24223
LS-7.9-840A	33.0/838	.31/7.9	10/254	250/1112	50	786210-24224
LS-7.9-1010A	41.3/1050	.31/7.9	12.5/318	250/1112	50	786210-24225
<b>316 Grade Stainless Steel — Uncoated</b>						
LS-4.6-200B	7.9/201	.18/4.6	2/51	100/444.8	100	786210-24227
LS-4.6-360B	14.2/360	.18/4.6	4 /102	100/444.8	100	786210-24228
LS-4.6-520B	20.5/520	.18/4.6	6/152	100/444.8	100	786210-24229
LS-4.6-680B	26.7/679	.18/4.6	8/203	100/444.8	100	786210-24230
LS-4.6-840B	33.0/838	.18/4.6	10/254	100/444.8	100	786210-24231
LS-7.9-200B	7.9/201	.31/7.9	2/51	250/1112	50	786210-24233
LS-7.9-360B	14.2/360	.31/7.9	4/102	250/1112	50	786210-24232
LS-7.9-520B	20.5/520	.31/7.9	6/152	250/1112	50	786210-24234
LS-7.9-680B	26.7/679	.31/7.9	8/203	250/1112	50	786210-24235
LS-7.9-840B	33.0/838	.31/7.9	10/254	250/1112	50	786210-24236
LS-7.9-1010B	41.3/1050	.31/7.9	12.5/318	250/1112	50	786210-24237

## Stainless Steel Cable Ties


### Ty-Rap® Stainless Steel Roller-Locking Cable Ties

Spring-tension head ensures snug, secure fit.


- Available in 302/304 and 316 grade stainless steel construction
- Round edges and smooth surfaces for fast, safe hand installation
- .18" width offers 150 lbs. tensile strength
- Five standard lengths plus custom lengths available



### How It Works

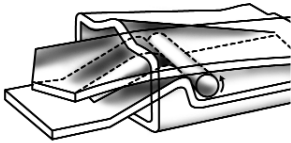

Insert the tail into the buckle. The internal locking bar rolls freely as the tie is tightened.

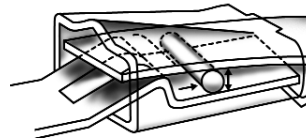

Once the proper tension is reached, the tool automatically cuts off the tail. The bar then wedges into the buckle, locking it tightly against both the top and bottom of the band.



Unique Spring-Tension Head Design provides extra-snug fit where bundle tightness is critical.

### Ty-Rap® Stainless Steel Roller-Locking Cable Ties

Cat. Number	Length (in/mm)	Width (in/mm)	Max. Bundle Dia. (in/mm)	Tensile Strength (lbs/N)	Std. Pkg. Qty.	UPC Number
<b>302/304 Grade Stainless Steel</b>						
TS-4.6-200A	8.8/222.9	0.18/4.6	2/50.8	150/667.20	100	786210-39374
TS-4.6-360A	15.3/388.0	0.18/4.6	4/101.6	150/667.20	100	786210-39375
TS-4.6-520A	21.3/540.4	0.18/4.6	6/152.4	150/667.20	100	786210-39377
TS-4.6-680A	27.8/705.5	0.18/4.6	8/203.2	150/667.20	100	786210-39379
TS-4.6-840A	33.8/857.9	0.18/4.6	10/254.0	150/667.20	100	786210-39380
<b>316 Grade Stainless Steel</b>						
TS-4.6-200B	8.8/222.9	0.18/4.6	2/50.8	150/667.20	100	786210-39381
TS-4.6-360B	15.3/388.0	0.18/4.6	4/101.6	150/667.20	100	786210-39382
TS-4.6-520B	21.3/540.4	0.18/4.6	6/152.4	150/667.20	100	786210-39383
TS-4.6-680B	27.8/705.5	0.18/4.6	8/203.2	150/667.20	100	786210-39384
TS-4.6-840B	33.8/857.9	0.18/4.6	10/254.0	150/667.20	100	786210-39385




## Stainless Steel Cable Ties


### Ty-Rap® Dual-Lock Stainless Steel Cable Ties

Strong and slip-free with a unique dual lock.

- 304 grade stainless steel construction
- Two-piece design
- Fast, easy installation
- Mini ties (.18" wide) offer 100 lbs. tensile strength
- Standard ties (.25" wide) offer 200 lbs. tensile strength
- Also available in 316 grade stainless steel (to order, add -316 suffix to catalog number)

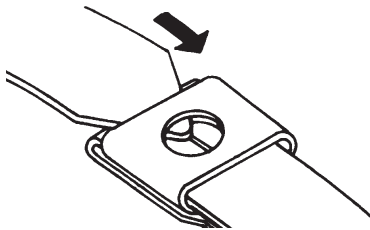

After wrapping the object to be tied, insert the free end of the tie through the buckle and into the tool.

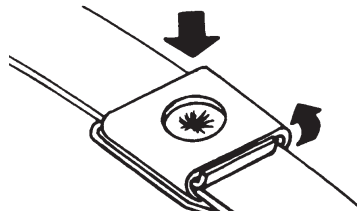

Squeeze the handle of the tool to create the dual lock and cut off the tail. The cable tie forms a low-profile dual lock.



The tail is formed into a fold lock behind the buckle. The tool forces a dimple in the band into a hole in the buckle.

### Ty-Rap® Dual-Lock Stainless Steel Cable Ties

Cat. Number	For Bundle Diameter of in/mm	Tensile Strength lbs/N	Width in/mm	Length in/mm	Weight lbs/kg	Std. Pkg. Qty.	UPC Number
<b>Mini Stainless Steel Cable Ties</b>							
SS7-180	1/25	100/444.8	.18/4.5	6.5/165	.70/.32	100	786210-91487
SS10-180	2/51	100/444.8	.18/4.5	10.0/254	.90/.41	100	786210-91488
SS16-180	4/102	100/444.8	.18/4.5	16.0/406	1.40/.64	100	786210-91489
SS23-180	6//152	100/444.8	.18/4.5	22.5/572	1.85/.84	100	786210-04153
SS29-180	8/203	100/444.8	.18/4.5	29.0/737	2.35/1.07	100	786210-04152
<b>Standard Stainless Steel Cable Ties</b>							
SS10-250	2/51	200/890	.25/6.35	10.0/254	1.10/.50	100	786210-91491
SS17-250	4/101	200/890	.25/6.35	16.5/419	1.80/.82	100	786210-91492
SS23-250	6/152	200/890	.25/6.35	22.5/572	2.50/1.13	100	786210-91493
SS29-250	8/203	200/890	.25/6.35	29.0/737	3.20/1.45	100	786210-91494
SS35-250	10/254	200/890	.25/6.35	35.0/ 889	3.80/1.72	100	786210-10478

304 Stainless Steel

.015" (.38mm) Thickness

NOTE: Other lengths available on special request.


Add suffix -316 for 316 Stainless Steel.

## Stainless Steel Cable Ties


### Ty-Rap Re-Usable Stainless Steel Cable Ties

Ties to use and re-use with quickness and ease!


- 200/300 series stainless steel construction
- Fully coated in non-toxic, halogen-free low-smoke Nylon 11 for extra corrosion resistance
- Unique buckle design for easy application and re-use
- May be double-wrapped for additional tensile strength
- Also available in 316 grade stainless steel (to order, add -316 suffix to catalog number)

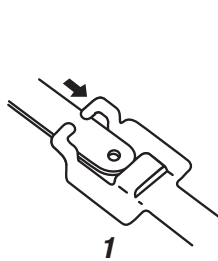


1  
Insert cable tie tail through holding tabs and locking emboss

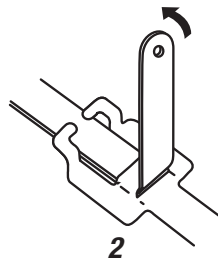


2  
Bend cable tie tail up

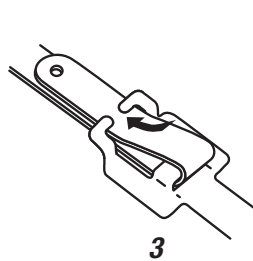

3  
Insert cable tie tail back through holding tabs, creating as tight a bend as possible

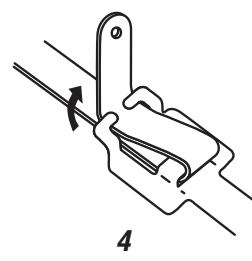

4  
For increased tensile strength follow steps #4 and #5

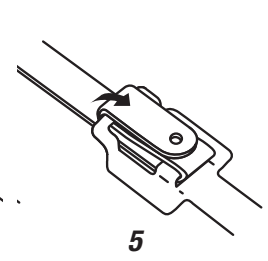

\*Patent Pending

Bend cable tie tail up

Fold cable tie tail over holding tabs

### Ty-Rap Re-Usable Stainless Steel Cable Ties

Cat. Number	Tensile Strength (lbs/N)	Width (in/mm)	Length (in/mm)	Weight (lbs/kg)	Std. Pkg. Qty.	UPC Number
SSR6-250C	75/333.60	.25/6.35	6/152	1.4/.64	100	786210-91496
SSR9-250C	75/333.60	.25/6.35	9/229	1.8/.82	100	786210-91497
SSR12-250C	75/333.60	.25/6.35	12/305	2.1/.95	100	786210-91498
SSR18-250C	75/333.60	.25/6.35	18/457	3.0/1.36	100	786210-91499
SSR24-250C	75/333.60	.25/6.35	24/610	3.7/1.68	100	786210-91513
SSR6-375C	100/444.80	.38/9.53	6/152	1.8/.82	100	786210-91514
SSR9-375C	100/444.80	.38/9.53	9/229	2.0/.91	100	786210-91515
SSR12-375C	100/444.80	.38/9.53	12/305	3.1/1.41	100	786210-91516
SSR18-375C	100/444.80	.38/9.53	18/457	4.4/2.00	100	786210-91517
SSR24-375C	100/444.80	.38/9.53	24/610	6.6/2.99	100	786210-91518
SSR30-375C	100/444.80	.38/9.53	30/762	7.0/3.18	100	786210-91519
SSR36-375C	100/444.80	.38/9.53	36/914	8.3/3.76	100	786210-91523

Material: 200/300 Series Stainless Steel

.015" (.38mm) metal thickness; .045" (1.1mm) coated thickness

NOTE: This product may be double-wrapped for additional tensile strength.

For additional colors and uncoated ties, consult Thomas & Betts Customer Service for pricing and availability.

For 316 Stainless Steel, add suffix -316 after catalog number. Consult Customer Service for availability.



## Stainless Steel Clamps & Cable Ties



### Multi-Lok Stainless Steel Self-Locking Cable Ties

Fire hazards — corrosive environments — temperature extremes — for many cable bundling applications, plastic ties are simply inadequate—or even dangerous.

That's why we developed stainless steel Multi-Lok Ties. Unaffected by fire, UV or extreme temperatures, corrosion-resistant Multi-Lok Ties provide a safe, strong, worry-free hold.

Quickly and easily applied by hand or with the Thomas & Betts Cable Tie Tensioner or Tensioning hook, Multi-Lok Ties feature a unique, self-locking, multiple-locking system that holds in excess of 200 lbs.

Multi-Lok Ties are manufactured from Type 316 stainless steel and are available either uncoated or coated with halogen-free, non-toxic black Nylon 11. This weather-resistant coating is unaffected by UV sunlight. This adds resistance to corrosion, chemicals, and weathering. Ties are available in two widths and various lengths.

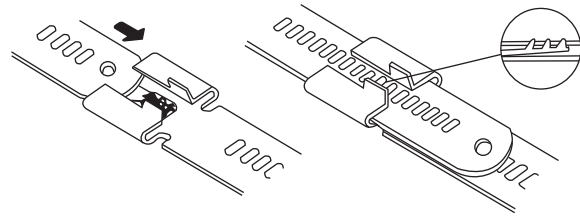

As the free end of the Multi-Lok tie passes through the buckle, three separate teeth (four teeth in the 12mm Multi-Lok) mesh with corresponding slots in the band automatically locking the tie as it is being tensioned. Self-locking Multi-Lok Ties feature an extremely strong, unique multiple locking system.



### Type 316 Stainless Steel—Nylon 11 Coated

Cat. Number	Tensile Strength		Width		Length		Weight		UPC Number
	lbs		in	mm	in	mm	lbs	kg	
<b>TYS6-280C</b>	250		.276	7	6	150	.66	.30	786210-91533
<b>TYS9-280C</b>	250		.276	7	9	225	.99	.45	786210-91534
<b>TYS12-280C</b>	250		.276	7	12	300	1.32	.60	786210-91535
<b>TYS18-280C</b>	250		.276	7	18	450	1.76	.80	786210-91536
<b>TYS24-280C</b>	250		.276	7	24	610	2.64	1.20	786210-81537
<b>TYS6-470C</b>	250		.472	12	6	150	1.10	.50	786210-91538
<b>TYS9-470C</b>	250		.472	12	9	225	1.65	.75	786210-91539
<b>TYS12-470C</b>	250		.472	12	12	300	2.20	1.00	786210-91540
<b>TYS18-470C</b>	250		.472	12	18	450	2.97	1.35	786210-91541
<b>TYS24-470C</b>	250		.472	12	24	610	4.29	1.95	786210-91542

Packaging Quantity: 100/bag

.010" (.245mm) Thickness

### Type 316 Stainless Steel—Uncoated

Cat. Number	Tensile Strength		Width		Length		Weight		UPC Number
	lbs		in	mm	in	mm	lbs	kg	
<b>TYS6-280</b>	250		.276	7	6	150	.66	.30	786210-91543
<b>TYS9-280</b>	250		.276	7	9	225	.88	.40	786210-91544
<b>TYS12-280</b>	250		.276	7	12	300	1.21	.55	786210-91545
<b>TYS18-280</b>	250		.276	7	18	450	1.98	.90	786210-91546
<b>TYS24-280</b>	250		.276	7	24	610	2.64	1.20	786210-91547
<b>TYS6-470</b>	250		.472	12	6	150	1.10	.50	786210-91548
<b>TYS9-470</b>	250		.472	12	9	225	1.65	.75	786210-91549
<b>TYS12-470</b>	250		.472	12	12	300	2.20	1.00	786210-91551
<b>TYS18-470</b>	250		.472	12	18	450	3.19	1.45	786210-91553
<b>TYS24-470</b>	250		.472	12	24	610	4.29	1.95	786210-91561

Packaging Quantity: 100/bag

.010" (.245mm) Thickness

## Stainless Steel Clamps & Cable Ties

### Ty-Rap® Free-End Stainless Steel Clamps

Pre-assembled for single or double wrapping.

- 201 grade stainless steel construction
- Double-wrapped clamps provide extra strength
- Available in various lengths, widths and thicknesses



### Ty-Rap® Free-End Stainless Steel Clamps

Cat. Number	Max. Dia. Once Around in/mm	Max. Dia. Twice Around in/mm	Length in/mm	Tensile Strength Single Wrap lbs/N	Band Width in/mm	Band Thickness in/mm	Weight lbs/kg	Std. Pkg. Qty.	UPC Number
SSH10-250	2/50	—	10/25	450/2002	.25/6.35	.02/.51	2.2/1.00	100	786210-91562
SSH16-250	3.5/88	1.5/38	16/40	450/2002	.25/6.35	.02/.51	3.1/1.41	100	786210-91563
SSH16-375	3.5/88	1.5/38	16/40	900/4003	.38/9.53	.03/.63	6.2/2.81	100	786210-91564
SSH18-500	4/101	2/50	18/45	1,400/6228	.5/12.70	.03/.76	10.5/4.76	100	786210-91565
SSH19-250	5/127	2.5/63	19/48	450/2002	.25/6.35	.02/.51	3.5/1.59	100	786210-05647
SSH21-625	5/127	2.5/63	21/53	1,700/7562	.63/15.88	.03/.76	15.1/6.85	100	786210-91567
SSH24-750	6/152	3/76	24/60	2,000/8896	.75/19.05	.03/.76	10.9/4.94	50	786210-91568
SSH27-250	7/177	3.5/88	27/68	450/2002	.25/6.35	.02/.51	4.6/2.09	100	786210-91569
SSH31-500	8/203	4/101	31/78	1,400/6228	.5/12.70	.03/.76	4.7/2.13	25	786210-91571
SSH34-250	9/228	4.5/114	34/86	450/2002	.25/6.35	.02/.51	5.6/2.54	100	786210-91572
SSH37-750	10/254	5/127	37/93	2,000/8896	.75/19.05	.03/.76	7.6/3.45	25	786210-91573
SSH44-375	12/304	6/152	44/112	900/4003	.38/9.53	.03/.76	3.6/1.69	25	786210-91574
SSH50-750	14/355	7/177	50/127	2,000/8896	.75/19.05	.03/.76	9.7/4.40	25	786210-91576
SSH56-625	16/406	8/203	56/142	1,700/7562	.63/15.88	.03/.76	9.0/4.08	25	786210-91578
SSH62-750	18/457	9/228	62/157	2,000/8896	.75/19.05	.03/.76	11.6/5.26	25	786210-91579
SSH69-625	20/508	10/254	69/175	1,700/7562	.63/15.88	.00/.76	10.7/4.86	25	786210-91581

Type 201 Stainless Steel

Other Free-End Clamp sizes and metals are available on special order.

### Ty-Rap® Stainless Steel Strap Cable Ties

Boiler rooms, shipyards, or off-shore oil platforms — a match for any severe environment!

- Stainless steel strap cable ties have been designed for high-temperature applications and for use in areas of harsh, corrosive environments
- Rated at 200-lb. tensile strength
- Smooth edges protect both the cable insulation and the installer



### Ty-Rap® Stainless Steel Strap Cable Ties

Cat. Number	Body Width in/mm	Length in/mm	Max. Wire Bundle Dia. in/mm	Tensile Strength lbs/N	Std. Pkg. Qty.	UPC Number
TYS8	.31/7.87	10.65/270.51	2/50.80	200/889.60	100	786210-80684
TYS14	.31/7.87	14.65/372.11	4/101.60	200/889.60	50	786210-80505
TYS22	.31/7.87	22.65/575.31	6/152.40	200/889.60	50	786210-80683
TYS28	.31/7.87	28.65/727.71	8/203.20	200/889.60	50	786210-80506

NOTE: Use WT3S Tool for tensioning

Cannot be coated with any covering material

Made of 316 stainless steel

## Stainless Steel Strapping, Locking Heads & Base

### Stainless Steel Strapping on a Reel

1,000-ft. reel to cut your desired length!



### Stainless Steel Strapping on a Reel

Cat. Number	Description	Width in/mm	Strength lbs/N	Std. Pkg. qty.	UPC Number
TYS1000	1,000 ft. of strap, 2 reels of 500 ft. each	.31/7.87	200/889.60	1	786210-86952

*Stainless steel ties of virtually any length can be produced from the 1,000-ft. reel in combination with the matching head.*

*NOTE: Use WT3S tool for tensioning*

### Stainless Steel Strapping Locking Heads

Lockable heads for stainless steel strapping.



### Stainless Steel Strapping on a Reel

Cat. Number	Description	Std. Pkg. Qty.	UPC Number
TYS5200H	Heads only for stainless strapping	50	786210-82697

### Stainless Steel Mounting Base

Long-lasting anchor hold.



### Stainless Steel Mounting Base

Cat. Number	Description	Std. Pkg. Qty.	UPC Number
TCS25	Mounting base for stainless steel ties	50	786210-81356



## Stainless Steel I.D. Tags

### I.D. Tagging System

Identify cable bundles with permanent, stainless steel imprintable tags.

- Apply Type 304 stainless steel tags with stainless steel cable ties
- Easy-to-use — slip a tie through the slots in the tag and fasten with the installation tool
- Works with ¼" wide ties
- .015" Thickness



### I.D. Tagging System

Cat. Number	Width in/mm	Length in/mm	Weight per 100 lbs/N	Std. Pkg. Qty.	UPC Number
SSID100	.75/	2.0/	0.5/	100	786210-91524
	19.05	50.80	2.22		
SSID101	1.50/	2.5/	1.2/	100	786210-91525
	38.10	63.50	5.34		
SSID102	.75/	3.5/	0.8/	100	786210-91532
	19.05	88.90	3.56		

Packaging Quantity: 100/box

NOTE: Customized pre-embossed tags are available. Please consult Technical Service for details.

Add suffix (316) for 316 Stainless Steel.

### I.D. Tag Imprinter

No second guessing — quickly and accurately position I.D. tags!

- Imprint Thomas & Betts stainless steel I.D. tags
- Includes special tag holder for secure positioning and a ½" character imprinting wheel, standard (no substitutions allowed)



### I.D. Tag Imprinter

Cat. Number	Description	Weight lbs/N	UPC Number
WTID200	I.D. Tag Imprinter	29.5/131.2	786210-91586
WTID290	½" Character Imprinting Wheel	—	786210-16047
WTID281	¼" Character Imprinting Wheel	—	786210-16046
WTID283	⅜" Character Imprinting Wheel	—	786210-16045
WTID204	(Kit) WTID200 and WTID 283	—	786210-73992

Packaging Quantity: 1/box

## Thomas & Betts S.S. I.D. Tag Strips/Carriers



### Thomas & Betts S.S. I.D. Tag Strips/Carriers

Cat. Number	Description	Length in/mm	Width in/mm	Wt. per 100 lbs	Std. Pkg. Qty.	UPC Number
ER043	6-Character Carrier	3.64/92.46	.38/9.65	.73	100	786210-09870
ER044	10-Character Carrier	5.14/130.56	.38/9.65	1.25	100	786210-09871
ER045	16-Character Carrier	7.39/187.71	.38/9.65	1.47	100	786210-09872
ER050	Short Strip	4.25/107.95	.38/9.65	.98	100	786210-09873
ER051	Medium Strip	5.75/146.05	.38/9.65	1.33	100	786210-09874
ER052	Long Strip	8.00/203.20	.38/9.65	1.85	100	786210-09875
ER060	I.D. Tag Kit	—	—	—	1	786210-09876


I.D. Tag Kit contains 50 of each letter, number, symbol, carrier, and strip in a handy carrying case.

## Stainless Steel I.D. Tags

### Thomas & Betts Stainless Steel I.D. Tags

Letters, numbers, and symbols — create easy-to-use custom identifications!

- Slip tags over carriers or strips (below) and attach to your cable or hose with a variety of Thomas & Betts Stainless Steel Cable Ties

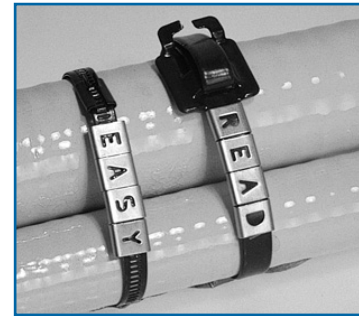

### Thomas & Betts Stainless Steel I.D. Tags

Cat. Number	Description	Length in/mm	Width in/mm	Wt. per 100	Std. Pkg. Qty	UPC Number
ER010	A	.45/2.00	.38/1.69	.31	100	786210-09833
ER011	B	.45/2.00	.38/1.69	.31	100	786210-09835
ER012	C	.45/2.00	.38/1.69	.31	100	786210-09834
ER013	D	.45/2.00	.38/1.69	.31	100	786210-09836
ER014	E	.45/2.00	.38/1.69	.31	100	786210-09837
ER015	F	.45/2.00	.38/1.69	.31	100	786210-09838
ER016	G	.45/2.00	.38/1.69	.31	100	786210-09839
ER017	H	.45/2.00	.38/1.69	.31	100	786210-09840
ER018	I	.45/2.00	.38/1.69	.31	100	786210-09841
ER019	J	.45/2.00	.38/1.69	.31	100	786210-09842
ER020	K	.45/2.00	.38/1.69	.31	100	786210-09843
ER021	L	.45/2.00	.38/1.69	.31	100	786210-09844
ER022	M+W	.45/2.00	.38/1.69	.31	100	786210-09845
ER023	N	.45/2.00	.38/1.69	.31	100	786210-09846
ER024	O	.45/2.00	.38/1.69	.31	100	786210-09847
ER025	P	.45/2.00	.38/1.69	.31	100	786210-09848
ER026	Q	.45/2.00	.38/1.69	.31	100	786210-09849
ER027	R	.45/2.00	.38/1.69	.31	100	786210-09850
ER028	S	.45/2.00	.38/1.69	.31	100	786210-09851
ER029	T	.45/2.00	.38/1.69	.31	100	786210-09852
ER030	U	.45/2.00	.38/1.69	.31	100	786210-09853
ER031	V	.45/2.00	.38/1.69	.31	100	786210-09854
ER032	X	.45/2.00	.38/1.69	.31	100	786210-09855
ER033	Y	.45/2.00	.38/1.69	.31	100	786210-09856
ER034	Z	.45/2.00	.38/1.69	.31	100	786210-09857
ER018	1	.45/2.00	.38/1.69	.31	100	786210-09841
ER037	2	.45/2.00	.38/1.69	.31	100	786210-09860
ER038	3	.45/2.00	.38/1.69	.31	100	786210-09861
ER039	4	.45/2.00	.38/1.69	.31	100	786210-09862
ER040	5	.45/2.00	.38/1.69	.31	100	786210-09863
ER041	6	.45/2.00	.38/1.69	.31	100	786210-09864
ER021	7	.45/2.00	.38/1.69	.31	100	786210-09844
ER042	8	.45/2.00	.38/1.69	.31	100	786210-09865
ER041	9	.45/2.00	.38/1.69	.31	100	786210-09864
ER024	0	.45/2.00	.38/1.69	.31	100	786210-09847
ER035	Minus/Hyphen (-)	.45/2.00	.38/1.69	.31	100	786210-09858
ER036	Blank ( )	.45/2.00	.38/1.69	.31	100	786210-09859
ER046	Plus (+)	.45/2.00	.38/1.69	.31	100	786210-09866
ER047	Earth (≈)	.45/2.00	.38/1.69	.31	100	786210-09867
ER048	Sine (~)	.45/2.00	.38/1.69	.31	100	786210-09869
ER049	Slash (/)	.45/2.00	.38/1.69	.31	100	786210-09868

Character size: .218"

Material: .025" 316 stainless steel

## Tools

The Right Tools Make Installing Ty-Rap® Stainless Steel Cable Ties a Cinch!

### Mini Tie Installation Tool

Perfect for mini-sized dual lock stainless steel ties.

- Pocket-sized, lightweight
- Installs mini-size stainless steel ties



Cat. Number	Description	Weight lbs/kg	Std. Pkg. Qty.	UPC Number
WTA290	Hand tool to apply mini stainless steel cable ties; easy-to-use tool applies tension, locks tie with the dual lock, and cuts off band flush with top surface of buckle	1.17/.53	1	786210-10481

### Standard Tie Installation Tool

Pocket-sized hand tool for quick and easy dual lock cable tie installations.

- Lightweight
- Installs standard-size stainless steel ties



Cat. Number	Description	Weight lbs/kg	Std. Pkg. Qty.	UPC Number
WTA250	Hand tool to apply standard stainless steel cable ties; easy-to-use tool applies tension, locks tie with the dual lock, and cuts off band flush with top surface of buckle	1.17/.53	1	786210-91584

### Tensioning Tools

Quality stainless steel tools for tensioning and installing.



WTAE200  
Cable Tie Tensioner



WTAE201  
Tensioning Hook



DAS250  
Pistol Grip Tensioning Tool

Cat. Number	Description	Weight lbs/kg	Std. Pkg. Qty.	UPC Number
WTAE200	Cable Tie Tensioner, For tensioning Reusable Ties and Multi-Lok Ties	.6/.27	1	786210-91588
WTAE201	Tensioning Hook, For tensioning Reusable Ties and Multi-Lok Ties	.1/.05	1	786210-91589
DAS250	Pistol Grip Tensioning Tool, For installing Multi-Lok, Ball Lock, & Roller Bar Lock SS Ties	1.0/.45	1	786210-35010



### Installation Tools

Apply tension, cut and secure with confidence!



**WTC001**  
A drop-forged tool with tensioning capability to do all 1/4" to 3/4" Free-End Clamp sizes.



**WTC075**  
Designed to install 1/4" to 3/8" wide Free-End Clamps. The lightweight, ratchet-action tool tension cuts and secures the buckle tab.



**WTJ020**  
Lightweight pocket-sized toll to install 1/4" and 3/8" wide Free-End Clamps. This tool also applies tension and has a built-in cutter.

Cat. Number	Description	Weight lbs/kg	Std. Pkg. Qty.	UPC Number
WTJ020	Compact Free End Stainless Steel Cable Tie Installation Tool for 1/4" to 3/8" sizes	1.1/1.50	1	786210-91591
WTC075	Pistol Grip Free End Stainless Steel Cable Tie Installation Tool for 1/4" to 3/8" sizes	2.6/1.18	1	786210-91595
WTC001	Free End Stainless Steel Cable Tie Installation Tool For All Sizes	4.4/2.00	1	786210-91593

### Ty-Rap® Installation Tool — Deltec & Stainless Steel

Makes tie installation easy!

- Installs stainless steel ties



Cat. Number	Description	Tie body Width In./mm.	Std. pkg. qty.	UPC Number
WT3S	Stainless Steel Installation Tool	up to .50/12.70	1	786210-81604

NOTE: Tensions only

# Thomas & Betts

ABB 通贝 ( Thomas & Betts ) 电气连接器和元器件  
授权分销商联系方式 :

信德迈科技(北京)有限公司 CNMEC Technology Company

地址 : 北京朝阳区望京街10号望京SOHO-T1-C座2115室

邮编 : 100102

电话 : 010-8428 2935, 8428 9077, 8428 3983

手机 : 139 1096 2635

Http : //www.cnmec.biz

E-mail : sales@cnmec.biz

传真 : 010-8428 8762

**Thomas & Betts Corporation**  
Electrical Division  
8155 T&B Boulevard  
Memphis, Tennessee 38125

**Thomas & Betts Ltd.**  
700 Thomas Avenue  
Iberville, Québec J2X 2M9

## United States

Tel: 901.252.8000  
Fax: 901.252.1354

## Canada

Tel: 450.347.5318  
Fax: 450.347.1976

## Technical Services

Tel: 888.862.3289

[www.tnb.com](http://www.tnb.com)