

# NUFLO 1502 WECO Union Liquid Turbine Flow Meters

The NUFLO™ 1502 WECO® Union Liquid Turbine Flow Meter incorporates a tungsten-carbide shaft and bearings to withstand the rugged conditions of the oilfield environment. Over the years, this flow meter has earned an unsurpassed reputation for withstanding severe punishment while maintaining operational and measurement integrity. WECO union turbine flow meters indicate flow rate and measure total throughput of a liquid line.

As liquid flows through the meter and over the rotor, the rotor turns at a speed that is directly proportional to the flow rate. A magnetic pickup senses the rotor blades as they pass and generates an electrical (sine wave) signal. Then, these electrical pulses are transmitted to the flow measurement readout equipment. Optional rotor configurations and/or finishes allow erosive or corrosive fluids such as mud or cement slurries and acids. The meter should be flushed with clean water following the use of any erosive or corrosive fluids.

## Specifications

Accuracy:	± 1.0% Standard Grade
Repeatability:	± 0.05%
End Connections:	2" and 3" 1502 WECO Union
Working Pressure:	10K sour, or 15K sweet service
Magnetic Pickups:	x 2 for local and remote monitoring
Temperature Range (magnetic pickup):	
Standard	-67° F to 250° F (-55° C to 121° C)
Medium	-67° F to 450° F (-55° C to 232° C)
	(requires high-temperature magnetic pickup)
Mating Output Connection:	AN3106A-10SL-4S
Compliances:	
	CSA Certified Hazardous Locations Class I, Group A, B, C, D
	CE-marked for Pressure Equipment Directive (PED)

## Applications

- High-pressure water injection trials
- Scale inhibitor treatments
- Well cleanouts with coil tubing
- Tubing valve opening/closing
- Mud/cementing operations (displacement volume monitoring)
- Flowback of treatment fluids



## Materials of Construction

Meter Body:	A286 stainless steel
Meter Vanes:	316L stainless steel
Rotor Shaft and Bearings:	Tungsten carbide
Union Nut:	Carbon steel
Magnetic Pickup Receptacle:	316L stainless steel

## Meter Options


- Binderless carbide shaft for enhanced corrosion resistance to selected chemicals
- Silver brazed shaft to withstand temperatures to 450° F (232° C) and chemicals that attack bearing bonding materials
- Nickel-plated rotors for enhanced corrosion resistance to selected chemicals (especially acids that corrode ferrous materials)
- Modified rotors for cement slurry or mud applications

## Benefits

- Rugged enough to withstand continual rig up/down
- Accurate and repeatable measurement
- Economical solution for turbine flow meter applications
- WECO union for quick installation
- Minimum maintenance
- Long service life, even in severe applications

## Installation

- The meter should be installed with the arrow on the meter body corresponding to flow direction of the line
- A length of straight pipe – usually a pup joint of 2" or 3" 1502 treating iron – must be installed upstream and downstream of the flow meter
- Valves or chokes should be located downstream of the flow meter

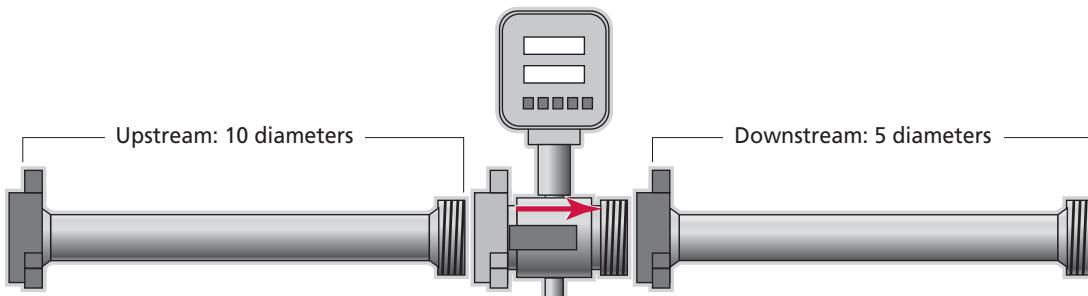

### Linear Flow Range <sup>1, 2, 3</sup>

Flow Meter Size <sup>3</sup> in.	mm	GPM	m <sup>3</sup> /HR	BPD	Nominal <sup>2</sup> Calibration Factor Pulses/Gal	Pulses x 1000/m <sup>3</sup>	Maximum Output Frequency Pulses/Sec	ΔP at Maximum Flow <sup>2</sup> psi kPa
1"	25	5 – 50	1.14 – 11.36	170 – 1700	900	(238)	750	20.0 138
1-1/2"	38	15 – 180	3.41 – 40.88	515 – 6000	325	(86)	975	16.0 110
2"	51	40 – 400	9.09 – 90.85	1300 – 13,000	55	(14.5)	365	22.0 152
3"	76	80 – 800	18.16 – 181.66	2750 – 27,500	57	(15.2)	760	20.0 138

<sup>1</sup> The linear flow range of liquids with non-lubricating characteristics is limited to the upper 60% of rating.

<sup>2</sup> Based on water.

<sup>3</sup> Consult a Cameron representative for liquid applications with viscosity above 5 centistokes.

Note: The meter will remain accurate at flow rates higher than its rating, but bearing wear and pressure drop across the meter can shorten the life span of the meter. Flow meters can be over-ranged by 10% for short periods without significant damage.

Traceability of pressure-containing components available on request.

### Cameron\_NuFlo测量系统\_流量及控制类仪表联系方式：

信德迈科技(北京)有限公司 CNMEC Technology Company

地址：北京朝阳区望京街10号望京SOHO-T1-C座2115室

邮编：100102

电话：010-8428 2935, 8428 9077, 8428 3983

手机：139 1096 2635

Http : //www.cnmec.biz

E-mail : sales@cnmec.biz

传真：010-8428 8762