


Description

The HT-3U Series is an all purpose light weight quality union designed for leak proof operation as it cycles through a wide range of temperatures. The design offers a non-restrictive flow with no variation in pipe diameter. The reusable sealing components are made of different metals having their own unique hardness and thermal properties, so as to further enhance the seal as temperature and pressure changes are encountered. The safety ring ensures safe venting of residual pressure.

Features

- Contains fugitive emissions.
- Designed to replace conventional medium pressure unions/couplings.
- Easier installation and maintenance.
- Fully interchangeable with each other.
- Low profile/light weight.
- Reduced chance of galling.
- Repeatedly reusable metal to metal seal.
- Unique automatic safety feature vents residual pressure during uncoupling should residual pressure remain.
- Only light torque required when tightening to rated pressure.
- Compact and available in any combination of threaded, butt weld, socket weld or barbed.
- Designed and tested to ANSI B31.3.
- Quality assurance to ISO 9001-2000.
- Material traceability availability.

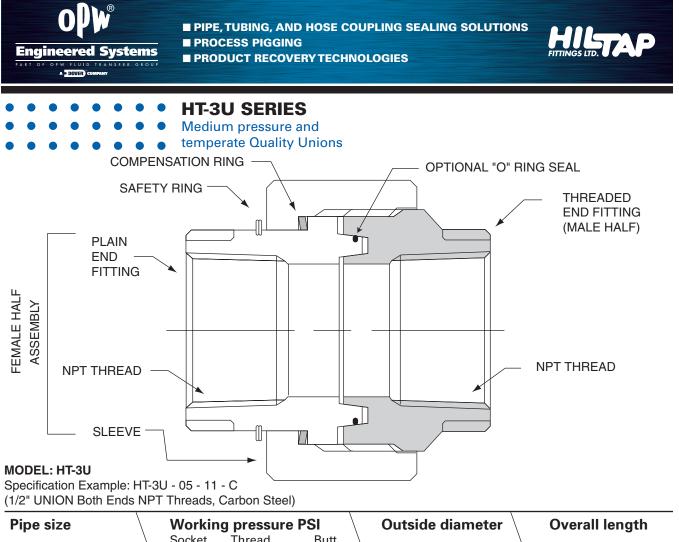

Pipe size		Working pressure PSI Socket Thread B	utt	Outside diameter	Overall length
(Inch)	(mm) \	S	ch.40 \	(Inch) (mm)	(Inch) (mm)
1/4 (0.250) 3/8 (0.375) 1/2 (0.500) 3/4 (0.750) 1 (1.0)	6.3 9.5 12.7 19.0 25.4	Pressure ratings for 100° F 38° Please contact Hiltap for Specifications	C	Please contact Hiltap for Specifications	Please contact Hiltap for Specifications

* For prolonged applications in temperatures above 800°F (427°C) use of stainless steel coupling is recommended.

Order Information HT3U - 05 - 11-C

Size	Plain end Threaded end	Material
1/4" 02- 0.250 inch (6.3 mm) 3/8" 03- 0.375 inch (9.5 mm) 1/2" 05- 0.500 inch (12.7 mm) 3/4" 07- 0.750 inch (19.0 mm) 1.0" 07- 1.0 inch (25.4 mm)	 Internally threaded Externally threaded Butt weld Socket weld male Socket weld female Hose barbed* *Special order 	 Carbon steel A350/LF2 Stainless steel 304/316/316L dual grade Aluminum 6061 T6 Other materials available (eg. Monel, Hastelloy, Inconel) *• Coatings (eg. Zinc, Cadmium, Teflon)

Note: For other materials, sizes and pressure ratings, consult Hiltap. Seal caps/plugs and dust caps are available

Distributed by: 信德迈科技(北京)有限公司CNMEC Technology Company 联络地址:北京朝阳区望京SOHO塔1C座2115室 电话:010-8428 2935 手机: 139 1096 2635 Http://www.cnmec.biz E-mail:sales@cnmec.biz