


# TRELLFLEX CRYOFLEX 200

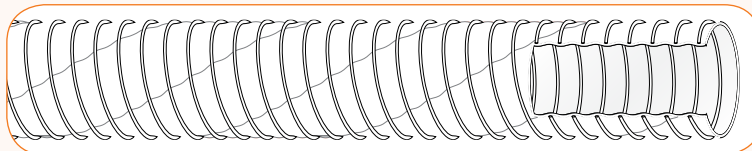

## CHEMICAL PETROCHEMICAL

Composite hoses/Cryogenic

### Applications

Cryogenic hose suitable for LNG transfer.  
Temperature down to - 196 °C.

### Technical description

**Inner tube:** PA/PET films and fabrics.

**Reinforcement:** PET layers between 2 stainless steel wires (AISI 316 L).

**Cover:** PET, white.

**Temperature range:** - 196 °C to + 45 °C.

**Standard/Approval:** EN 13766:2010, Type 2, Class A.

### Couplings/Fittings

SS 316L flanges.

Rope lagging in option.

## TRELLFLEX CRYOFLEX 200

01/03/2013

ID	Working pressure	Bursting pressure	Max vacuum	Bending radius	Weight	Length
inch	bar	bar	bar	mm	kg/m	m
1"	13	52	full	150	0.8	30
2"	13	52	full	200	1.9	30
2"1/2	13	52	full	200	2.0	30
3"	13	52	full	250	3.5	30
4"	13	52	full	500	5.4	30
6"	13	52	full	660	14.2	20
8"	13	52	full	910	21.5	20
10"	13	52	full	2500	29.8	12

### Marking:

TRELLEBORG - EN13766:2010 - CLASS A - Type 2 - 13 bar -- 200 + 45 °C - PA - QQ/YY

↔ Upon availability.

CNMEC Technology (Beijing) Co., Ltd.

Add: RM2115, T1-C Tower, Wangjing SOHO, Chaoyang District, Beijing 100102, China

Tel: 010 - 84282935, 13910962635 Fax: 010 - 84288762

E-Mail: sales@cnmec.biz