


# TRELLFLEX CRYOFLEX 50

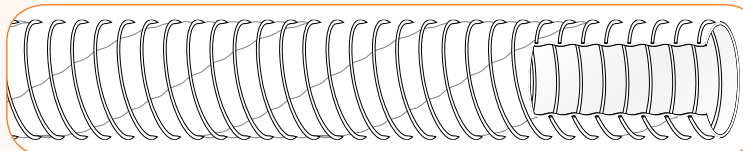

## CHEMICAL PETROCHEMICAL

Composite hoses/Cryogenic

### Applications

Cryogenic hose suitable for LPG transfer.  
Temperature down to - 50 °C.

### Technical description

**Inner tube:** PA/PET films and fabrics.

**Reinforcement:** PET layers between 2 stainless steel wires (AISI 316 L).

**Cover:** PET, white.

**Temperature range:** - 50 °C to + 45 °C.

**Standard/Approval:** EN 13766:2010, Type 1, Class A.

### Couplings/Fittings

SS 316L flanges.

Rope lagging in option.

## TRELLFLEX CRYOFLEX 50

07/02/2013

ID	Working pressure	Bursting pressure	Max vacuum	Bending radius	Weight	Length
inch	bar	bar	bar	mm	kg/m	m
1"	25	100	full	150	0.8	30
2"	25	100	full	200	1.9	30
2"1/2	25	100	full	200	2.0	30
3"	25	100	full	250	3.5	30
4"	25	100	full	500	5.4	30
6"	25	100	full	660	14.2	20
8"	25	100	full	910	21.5	20
10"	25	100	full	2500	29.8	12

### Marking:

TRELLEBORG - EN13766:2010 - CLASS A - Type 1 - ND - 25 bar - - 50 + 45 °C - PA - QQ/YY

↔ Upon availability.

CNMEC Technology (Beijing) Co., Ltd.

Add: RM2115, T1-C Tower, Wangjing SOHO, Chaoyang District, Beijing 100102, China

Tel: 010 - 84282935, 13910962635 Fax: 010 - 84288762

E-Mail: sales@cnmec.biz