




INDUSTRIAL DRY BREAK COUPLINGS 23 SERIES

Featuring...

Snap-tite quality with superior pressure and flow characteristics over the competition

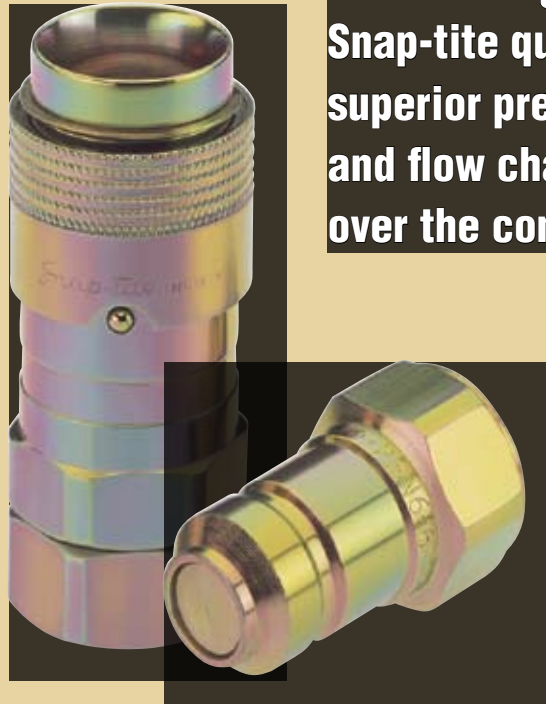

- ***Rugged construction***
- ***High strength steel with Zinc Trivalent Chromate plating[†] for corrosion resistance***
- ***Push-to-connect ball-locking mechanism for positive connection***
- ***Sizes 3/8" & 1/2"***
- ***Safety sleeve lock as standard***
- ***Connects against static pressures to 200 psi (14 bar)***

[†]Conforms with ROHS and WEEE European Union Directives


Snap-tite's 23 Series is designed for demanding hydraulic applications. Typical applications include mobile equipment, hydraulic hand tools and in-plant hydraulics including test stands where a dry break is required for cleanliness. As protection against accidental disconnection, the 23 Series is equipped with a standard sleeve lock. The flush nipple valve aids in the prevention of system contamination by reducing the build up of dirt and grit.

**Snap-tite**

PRESSURE RATINGS

SIZE	SPILLAGE (cc)	AIR INCLUSION (cc)	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
			PSI	BAR	PSI	BAR
3/8"	.03	.25	3,000	210	6,000	415
1/2"	.04	.30	3,000	210	6,000	415


TECHNICAL AND DIMENSIONAL INFORMATION

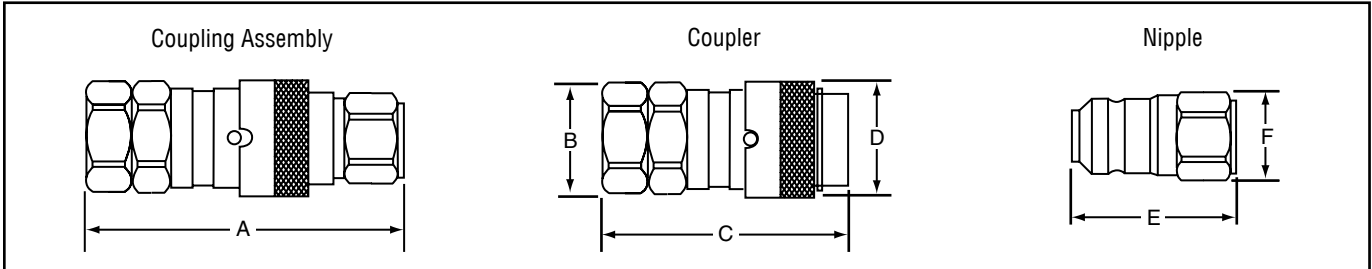

SIZE	A		B		C		D		E		F	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
3/8"	3.34	84.34	1.00	25.40	2.65	67.31	1.20	30.48	1.65	41.91	.94	23.88
1/2"	4.53	114.06	1.25	31.75	3.36	85.34	1.50	38.10	2.38	6.45	1.06	26.92

Notes: Hex dimensions from flat of hex.
 Part configurations are typical only.
 Ratings, specifications and dimensions are subject to change without notice.

FLOW CHART

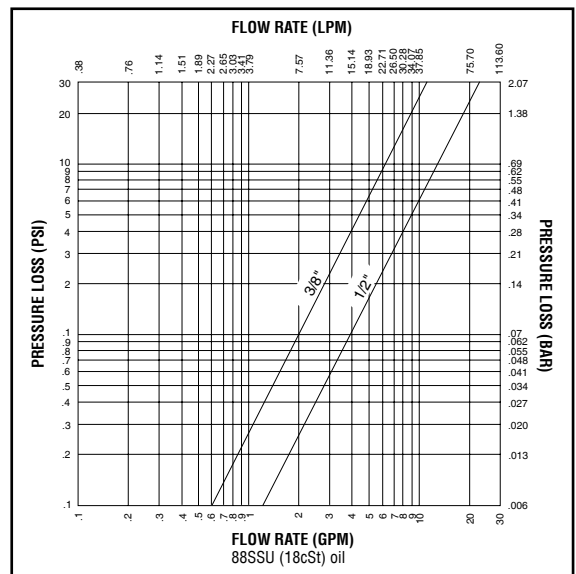

HOW TO ORDER

PART NO.	23	-1C	6	6	F	
Series	Coupling Half	Coupling Size	End Fitting Size	End Fitting Type	Seals	
23	-1C Coupler N Nipple	6 = 3/8" 8 = 1/2"	6 = 3/8" 8 = 1/2"	F Female NPSF RP Female British Parallel BS2779	No letter-Buna N V = Viton	

美国Parker Snap-Tite Quick Couplings快速接头
 授权代理商联系方式：



Quick Disconnect & Valve Division
 201 Titusville Road
 Union City, Pennsylvania 16438-8699 USA
 PH: 814-438-3821 FAX: 814-438-3069
 e-mail: qd&v_sales@snap-tite.com
 www.snap-tite.com

ISO-9001 Certified

01-0018BE-0608

信德迈科技(北京)有限公司 CNMEC Technology
 地址：北京朝阳区望京SOHO-T1-C座2115室
 邮编：100102
 电话：010 - 8428 2935 , 8428 9077
 手机：13910962635
 传真：010 - 8428 8762
 Email：sales@cnmec.biz
 Http://www.cnmec.biz