

 Snap-Tite

For
Natural &
Propane Gas

GF
SERIES






GF Series — For Natural & Propane Gas




- **Safety** – Valve on coupler half will automatically shut off gas flow instantly when coupling is disconnected and automatically open on connection. Snap-tite's GF Series incorporates a safety fuse in the nipple to automatically shut off the gas supply to your gas appliance once temperatures exceed 350°F (177°C).
- **Size** – Available in sizes 1/4" through 1-1/4".
- **Construction** – GF series couplings are of brass construction.
- **Certified** – Snap-tite GF Series is certified by the Canadian Standards Association to meet ANSI Z21.41-1998 and CSA 6.9-M98 standards. This certification is for use with natural, manufactured and mixed gas, liquified petroleum and LP gas mixtures.
- **Dust caps and plugs** – Plastic dust caps for nipples and dust plugs for couplers are available to keep out dirt and grease when couplings are not in use.


Snap-tite fusible link protects against unwanted gas-fed fires.

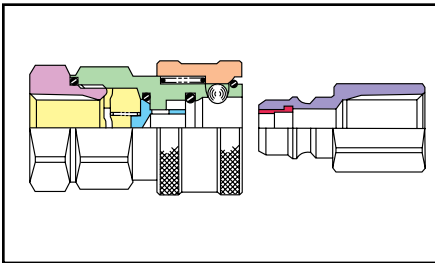

Disconnected: Valve in coupler shuts gas off (QD valve should not be the only means to shut gas supply off over an extended period of time. A gas shut-off valve should be installed before the coupler for extended periods).

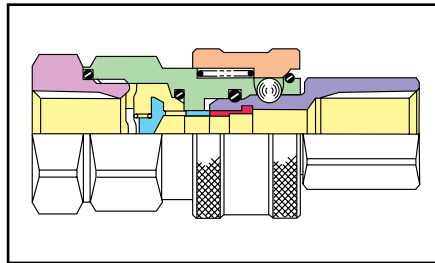

Connected: Valve opens allowing free flow of gas.

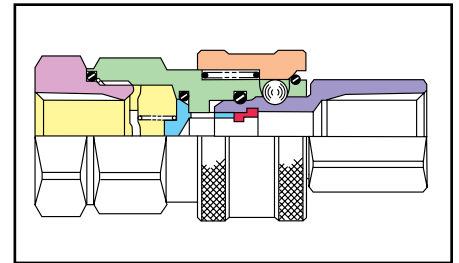

Valve automatically closes when temperature exceeds 350°F (177°C), thus preventing a gas-supported fire.

How to Order

To order, simply give the part number noted below for the size of gas line you will be connecting to. Gas units are sold as sets consisting of a valve coupler and a plain nipple with fusible link.

Size	Coupler	Nipple
1/4"	BVGFC4-4F	BPGFN4-4F
3/8"	BVGFC6-6F	BPGFN6-6F
1/2"	BVGFC8-8F	BPGFN8-8F
3/4"	BVGFC12-12F	BPGFN12-12F
1"	BVGFC16-16F	BPGFN16-16F
1-1/4"	BVGFC20-20F	BPGFN20-20F

Size	Coupler Plug	Nipple Cap
1/4"	PDP-4	PDC-4
3/8"	PDP-6	PDC-6
1/2"	PDP-8	PDC-8
3/4"	PDP-12	PDC-12
1"	N/A	N/A
1-1/4"	N/A	N/A



总经销商:

信德迈科技(北京)有限公司 CNMEC Technology

地址: 北京市朝阳区望京SOHO-T1-C座2115室

邮编: 100102

*Tel: 010-8428 2935 | * Fax: 010-8428 8762

*手机: 139 1096 2635

*电子邮件: sales@cnmec.biz

主页: <http://www.cnmec.biz>