


# N-Dura®

*Nylon*

*Double Jacket*

*Attack Hose*

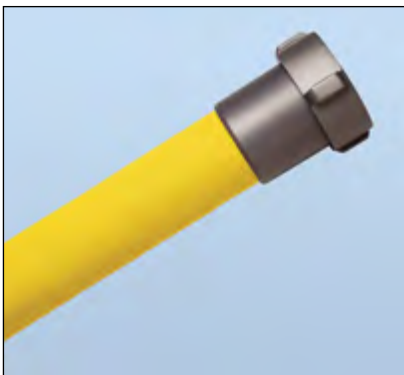

## **Delivering the Lowest Friction Loss in its Class**

N-Dura® has an outstanding record of durability and value: 30 years of fireground experience and millions of feet sold prove that it is one of America's favorites. Produced from high quality raw materials to exacting standards, this rubber lined, nylon, double jacketed hose has extinguished fires in every state, for the largest cities and the smallest volunteer fire departments.

ATTACKLINE

## Features

- Top quality, double jacket, rubber lined municipal fire hose made from 100% high-strength, low stretch, air-entangled nylon for enhanced abrasion and kink resistance along with a lining of extruded EPDM rubber tube for long term adhesion.
- Outer jacket is manufactured with a tight weave with a high “pick” count to virtually eliminate snagging and pulling while on the fireground.
- Reverse twill weave of the inner jacket provides a smooth waterway, delivering the lowest friction loss in its class.
- Well suited for C.A.F.S. and foam solution application.
- Standard Dura-Cote™ protective treatment.
- Liner remains flexible to temperatures as low as -40°F (-40°C) and is highly resistant to ozone and oxidation.
- Manufactured in accordance with NFPA 1961 standard, latest edition within our ISO-9001 certified quality assurance system.



SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (50' Coupled)	BOWL SIZE
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN
1½"	400 (2760)	800 (5515)	1200 (8275)	15 (6.8)	1½ 1/16"
1¾"	400 (2760)	800 (5515)	1200 (8275)	16 (7.3)	2 3/16"
2"	400 (2760)	800 (5515)	1200 (8275)	20 (9.1)	2½"
2½"	400 (2760)	800 (5515)	1200 (8275)	26 (11.8)	3"
3"	400 (2760)	800 (5515)	1200 (8275)	34 (15.4)	3 17/32"

As per NFPA 1961 - The service test pressure is to be 10% greater than the "normal highest operating pressure" at which the hose is expected to be used.



ATTACK



C.A.F.S.

## How to Order

TYPE	HOSE I.D. X HOSE LENGTH	COLOR (Dura-Cote)	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
NP	15 = 1½" 17 = 1¾" 20 = 2" 25 = 2½" 30 = 3"	Y = Yellow R = Red B = Blue O = Orange G = Green T = Tan W = White (Coated)	15 = 1½" 20 = 2" 25 = 2½" 30 = 3"	N = NH I = IPT	Blank = Aluminum

**Part No. Example: NP17X50R15N =**

NP N-Dura Hose, 1¾" ID by 50' Length, Red, 1½" Aluminum NH/NST Threaded Coupling

## Construction

Nylon Double Jacket EPDM  
Rubber Inner Liner

## Temperature Range

-40° to 150°F (-40° to 65°C)

## Couplings

Aluminum NH/NST,  
IPT Threaded

## Colors

