

# HFV

**HEAVY DUTY ATTACK/SUPPLY HOSE**



# HFX - Type HFX




## Extruded Nitrile Rubber Attack/Supply Hose

Snap-tite HFX is a nitrile thru-the-weave, rubber covered fire hose that utilizes both polyester and nylon yarn in the reinforcing jacket. Under pressure, the polyester keeps the hose from “snaking” where the nylon allows for controlled dilation, reducing friction loss and generating higher flow rates. Our special rubber compound provides a tough cover that resists heat, abrasion, snags, and hot embers.

HFX’s unique extruded thru-the-weave construction provides a flexible, easy to maneuver hose that is easy to pack. The interlocking matrix also means no adhesives are used and there is a permanent bond to all the warp and weft yarns.

### Properties and Construction

- HFX is an extruded thru-the-weave, nitrile rubber fire hose. The reinforcement is made with a blend of circular woven, twill weave, polyester and nylon fibers.
- The ribs on the cover surface greatly increase abrasion resistance and help provide a long service life.
- Highly resistant to both contact and radiant heat.
- Hose remains flexible to temperatures as low as -5°F (-20°C) and is resistant to ozone, oxidation, and most chemicals or petroleum products.
- Engineered for attack, supply, soft-sleeve suction and relay applications.
- Snap-tite HFX is manufactured in accordance with NFPA standard 1961, latest edition within our ISO-9001 certified quality assurance system.

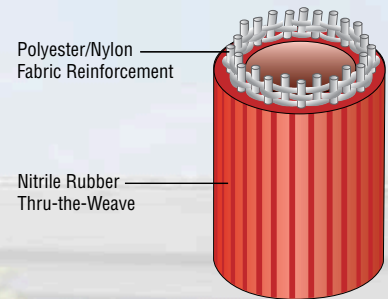

### Construction:

Extruded Nitrile Cover/Liner  
Polyester/Nylon Reinforcement

### Temperature Range:

-5° to 200°F (-20° to 95°C)

### Couplings Available:

Aluminum or Brass NH/NST  
or IPT Threaded & Aluminum  
Storz options

### Approvals:

Most sizes UL and ULC  
(UL Canada) listed

SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (For 50' Coupled)	FLAT WIDTH	HOSE BED Volume (100')	BOWL SIZE	CERTIFICATION AVAILABLE
	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	FT <sup>3</sup>	IN	
1"	300 (2070)	600 (4140)	900 (6200)	8 (3.6)	1.75	1.0	1-3/16	
1-1/2"	300 (2070)	600 (4140)	900 (6200)	13 (5.9)	2.75	2.5	1-13/16	UL, UC
1-3/4"	300 (2070)	600 (4140)	900 (6200)	17 (7.7)	3.20	2.5	2-1/16	UL, UC
2"	300 (2070)	600 (4140)	900 (6200)	18 (8.1)	3.50	3.0	2-5/16	UL
2-1/2"	300 (2070)	600 (4140)	900 (6200)	26 (11.8)	4.25	3.5	2-13/16	UL, UC
3"	300 (2070)	600 (4140)	900 (6200)	33 (15)	5.00	4.5	3-5/16	
4"	230 (1585)	460 (3170)	700 (4825)	45 (20.4)	6.50	5.5	4-5/16	UL, UC
5"	200 (1380)	400 (2760)	600 (4140)	53 (24)	8.20	7.0	5-5/16	UL, UC
6"	150 (1035)	300 (2070)	500 (3450)	67 (30.4)	9.75	12.0	6-5/16	

### How to Order

HFX	40X50	Y	40	S		
TYPE	HOSE I.D. x HOSE LENGTH	COLOR	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL	OPTIONS
HFX	10 = 1" x 50 = 50'	Y = Yellow	10 = 1"	N = NH	Blank=	UL=UL
	15 = 1-1/2" x 100 = 100'	R = Red	15 = 1-1/2"	I = IPT	Aluminum	Labeled
	17 = 1-3/4"	O = Orange	20 = 2"	S = Storz	BR=Brass	UC=UL
	20 = 2"	K = Black	25 = 2-1/2"		Rocker Lug	Canada
	25 = 2-1/2"		30 = 3"		BP=Brass	Labeled
	30 = 3"		35 = 3-1/2"		Pin Lug	
	40 = 4"		40 = 4"			
	50 = 5"		45 = 4-1/2"			
	60 = 6"		50 = 5"			
			60 = 6"			

### Hose Colors:



ATTACK



SUPPLY



SOFT SUCTION



LISTED

Snap-Tite授权代理商：

信德迈科技(北京)有限公司 CNMEC Technology Company

地址：北京市朝阳区望京街10号望京SOHO-T1-C座2115室

邮编：100102 QQ：1152366120

电话：010-8428 2935 手机：139 1096 2635

传真：010-8428 8762

Http://www.cnmec.biz

Part Number Example: HFX40X50Y40S = HFX Hose, 4" ID by 50' Length, Yellow, 4" Aluminum Storz Coupling